
The Contractor shall complete all allotment earthwork operations in such a manner, to allow an approved Geotechnical testing company's certification that site filling has been placed as Level 1 "Controlled Fill" in accordance with the provisions of AS 3798-2007.

The frequency of control testing shall be in accordance with the provisions of Table 8.1 of AS 3798-2007.

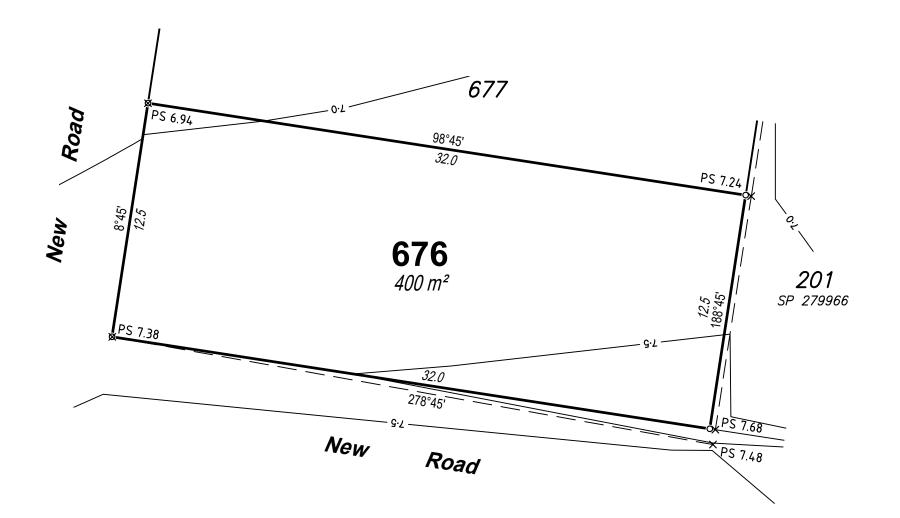

## **DISCLOSURE PLAN**

For Proposed Lot 676 on SP289852, North Harbour Stage 22


CURRENTLY DESCRIBED AS Lot 2000 on SP279976

**Burpengary East** LOCAL AUTHORITY Moreton Bay Regional Council

## Legend Area of Fill Proposed Surface Contour -Fill Depth Contour Proposed Surface Level X PS 6.120 Proposed Retaining Wall Proposed Earthworks Batter

## Notes

- Area & Dimensions are subject to Survey Plan Registration.
- Proposed contours, fill and retaining wall details are compiled from the engineering design plans provided by KN Group Pty Ltd, received on 05/07/2017.
- Due to plotting limitations the retaining walls shown are indicative only and may not show the true width of the wall.
- Levels shown are referenced to the Australian Height Datum (AHD)
- This plan was prepared to satisfy Section 11 of the Land Sales Act QLD 1984.
- Builders shall not build off the design levels shown; a site survey is required.
- These notes are an integral part of this plan.





RPS Australia East Pty Ltd 743 Ann Street Fortitude Valley Qld 4006 t: +61 7 3237 8899 reproduction or amendment
Please contact the author.

www.rpsgroup.com.au

This plan has been prepared by RPS Australia East Pty Ltd (Cadastral Surveyor) to satisfy the requirements of the Land Sales Act 1984.

| DWG. 20430 Stage 22 Dis |         |         | SH. 1 0† 1 |      |
|-------------------------|---------|---------|------------|------|
| DATE                    | PROJECT | PLAN    |            | AMD. |
| 21/08/17                | 20430   | 198/676 |            | -    |